

UniTube®

Universal Industries, Inc.



***Up to
300
tonnes p/h**

22120 Tube Conveyor S-Drive

Up to 300
tonnes per hour*

MODEL	22120 Tube Conveyor
CAPACITY	Up to 300 tonne per hour* *Capacity depends on material, moisture, density and angle
TUBING	14" Diameter Tubes
BELT 1	22" 2 Ply Chevron
BELT SPEED	Standard 600 FPM
S-DRIVE OPTIONS	Electric or PTO
HOPPER	Collapsible Canvas Hopper
CONSTRUCTION	Carbon Steel
STANDARD ACCESSORIES	Wind Guards
OPTIONAL ACCESSORIES	Bottom Guards

Eagle i Machinery Pty Ltd

Newell Hwy (PO Box 189), Finley NSW 2713

T (03) 5883 2391 F (03) 5883 3179 E office@eaglei.com.au

www.eaglei.com.au




Uni Tube®

Universal Industries, Inc.

22120

Tube Conveyor S-Drive

*Up to 300 tonnes p/h

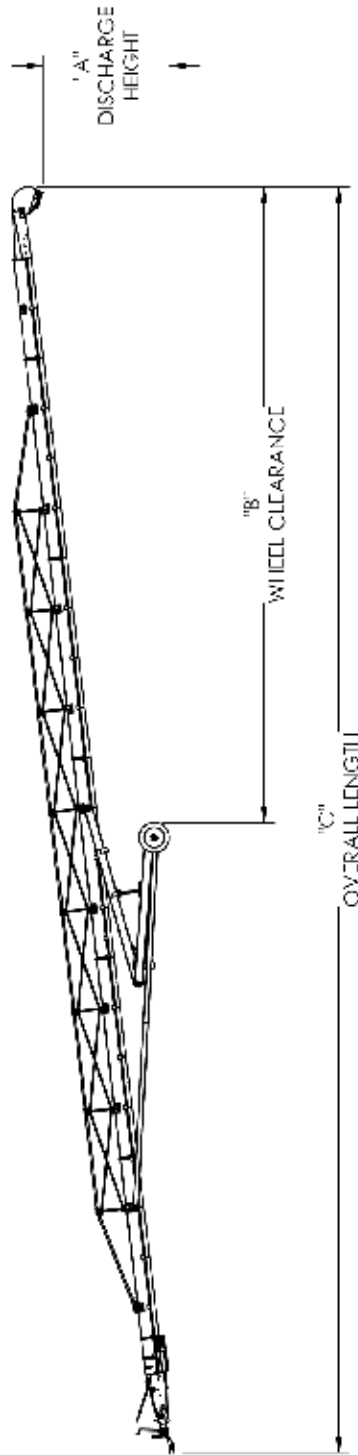

Transport		Lowered			25 Degrees			Max (30 Degrees)			Additional Information	
Overall Height At 18" Hitch Height	C	A	B	C	A	B	C	A	B	C	Outside Wheel Width*	Electric HP
14'-8-1/4"	126'-2-1/4"	12'-7"	63'-2-1/2"	125'-10-1/4"	50'-5"	55'-9-1/4"	115'-3/4"	60'-9-3/4"	51'-11-3/4"	109'-7-1/2"	12'	50

Dimensions are Subject to Change
* Axle Extends to 16'

NOTE: Unit application, location and specifications determine the type, quantity and/or placement of electrical, electrical safety or other safety controls required. Whether these controls are supplied by Universal Industries or another supplier, all OSHA safety and health standards, the National Electrical Code and local codes must be met and followed. Because we constantly strive to provide the finest material handling equipment, establishing industry standards, specifications must remain subject to change without notice.



Eagle i Machinery Pty Ltd

Newell Hwy (PO Box 189), Finley NSW 2713

T (03) 5883 2391 F (03) 5883 3179 E office@eaglei.com.au

www.eaglei.com.au

